

A060-CM06 - FLÜSSIG-CO₂-DOSIERUNG FÜR DÄMMENDEN POLYSTYROL-HARTSCHAUM

APPLICATION NOTE A060-CM06

LIQUID CO₂ DOSING FOR POLYSTYRENE FOAM EXTRUSION

Extrusion is an effective technique to manufacture products with a uniform, even complex cross section. The basics of this technique are simple: heat the to-be-extruded material until it can deform somewhat, and force this material to flow through a mould or extrusion head with the desired cross section and shape.

Extrusion of dense polymers results in dense products. However, incorporating a blowing agent in the process will add porosity to the products, leading to low-density and sometimes with excellent acoustic or thermal isolation properties. Non-flammable, non-toxic and cost-efficient chemically inert liquid CO₂ is one of the blowing agents that are used. A needle valve was used in the original setup to dose liquid CO₂ to the extruder. However, the stability of this kind of dosing was poor, and often lead to production breaks. A supplier of Bronkhorst equipment was requested to realise a better solution.



Polystyrene foam

Application requirements

To obtain a uniform polystyrene foam structure, accurate dosing of the liquid carbon dioxide in the presence of a fluctuating extruder pressure is essential. The extrusion process should be continuous - so without production breaks - and stable.

Important topics

- Stable extrusion process
 - Very few production breaks
-


Process solution

An M14 mini CORI-FLOW Coriolis mass flow meter combined with a Badger valve is the solution here.

By compressing gaseous carbon dioxide at room temperature to more than 50 bars, it becomes a liquid. In the present application, the maximum applied pressure is even 250 bars, and the dosing equipment should be able to handle this pressure. The M14 mini CORI-FLOW mass flow meter/controller is capable of that, and doses 4 to 50 grams liquid carbon dioxide to the extruder, independent of the extruder pressure.

The Badger valve, which is positioned downstream of the M14, is pneumatically controlled. Liquid carbon dioxide expands to its gaseous form when subjected to a lower pressure near the extruder. For this evaporation the carbon dioxide requires heat, which it extracts from the surrounding that cools down. Kalrez seals can not handle the low temperature that is associated with this expansion, so teflon seals are used in the badger valve for this application. Using this flow controller/Badger valve setup, the manufacturer of the decorative polystyrene foam parts has been able to produce several weeks continuously, so the number of production breaks has decreased drastically.

As the customer is satisfied, he decided to order two more of these liquid carbon dioxide dosing systems for the other extrusion production lines.

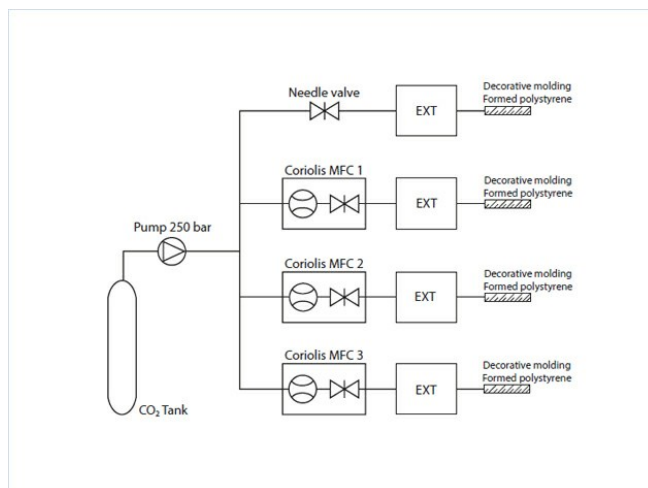

Flow scheme

Recommended Products



MINI CORI-FLOW™ MXX

Min. Bereich 0,05...5 ml/h
Max. Bereich 3...300 l/h
Druckstufe bis zu 200 bar
Hohe Genauigkeit, schnelle Messung
Dichte und Temperaturansicht



EL-PRESS P-502C

Min. Druck 2...100 mbar
Max. Druck 1,28...64 bar
Absolut- oder Überdruck
Hohe Genauigkeit



IN-FLOW F-110CI

Min. Bereich 0,014...0,7 mln/min
Max. Bereich 0,06...9 mln/min
Druckstufe 100 bar
Kompaktes IP65 Design
Hohe Genauigkeit



BRONKHORST DEUTSCHLAND NORD GMBH

Südfeld 1b

59174 Kamen (GER)

Tel. +49 230792512-0

info@bronkhorst-nord.de

