


DATASHEET FLOW MEASUREMENT IN MICROFLUIDICS A058

APPLICATION NOTE

Flow measurement in microfluidics

A manufacturer of microfluidic systems was looking for a flow solution to measure micro fluids more efficiently. At the start of their search, thermal mass flow meters were used. However, they observed that the thermal mass flow measurements in their application were too unstable and could not be reproduced. Bronkhorst suggested an alternative solution, using Coriolis technology for the microfluidic flow meter.

In microfluidic systems, liquids behave in a different way compared to flow in 'normal' channels. Due to the small size of the channels, the 'fluid-wall' phenomena play a dominating role. Microfluidic devices find their application in fields such as pharmaceuticals and biotechnology, reducing the number of chemicals and experimental time.

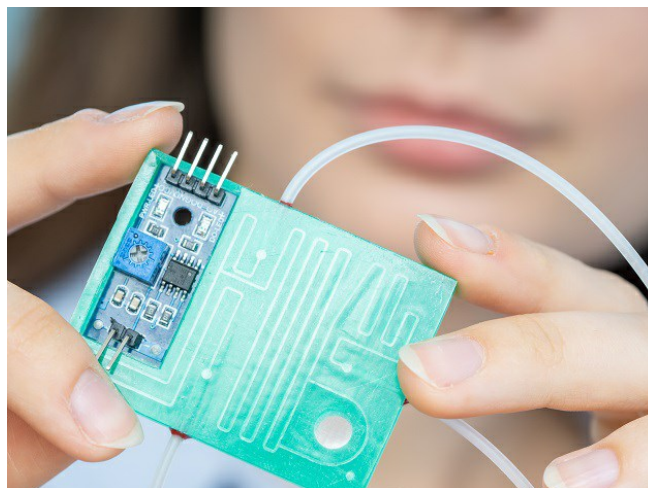

Application requirements

For this application, the microfluidic systembuilder desired to limit the number of flow instruments by simplifying the solution. In the consisting setup, five mass flow meters were used to cover a specific flow range. A second wish was to improve the accuracy and repeatability of the measurement itself.

Important topics


- Simplified solution, using fewer flow meters
 - Better accuracy and repeatability
 - Stable flow measurement
-

Process solution

Looking at the user's needs, Bronkhorst concluded that the [ML120 mini CORI-FLOW](#) flow meter series would be able to cover the entire microfluidics range needed. The idea was to test this *Coriolis* flow meter and to compare the results with the ones from the *thermal* flow meter. During two months the ML120 device was test thoroughly.

The test results stated that using the *Coriolis-based* flow meter the accuracy, stability and repeatable where better then the original setup with *thermal* flow meters. Moreover, the results showed that it was possible to replace five thermal mass flow meters by one Coriolis-based flow meter ([ML120 mini CORI-FLOW](#) series) with a large dynamic range to cover the same range. Not even was the test successful, but the customer integrated the [ML120](#) device in their product range as well.

As part of further cooperation with Bronkhorst, the microfluidic system builder developed a user guide for (future) users and a selling guide for the sales engineers. Moreover, some programming work in [LabVIEW](#) is performed to communicate with Bronkhorst devices.

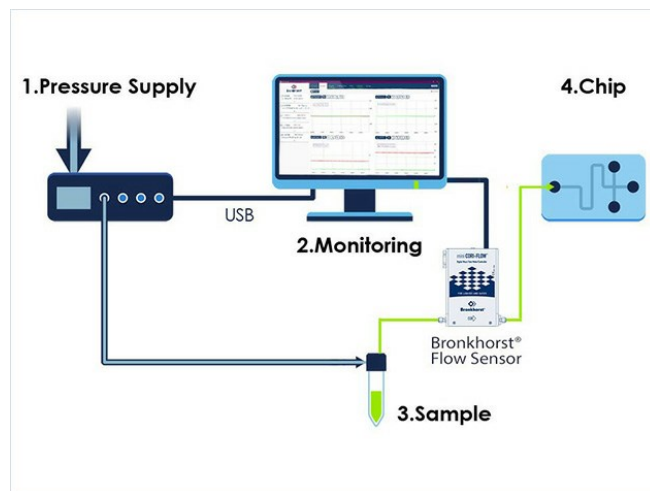

Flow scheme

Recommended Products



MINI CORI-FLOW™ ML120V00

Flow range 0...200 g/h

Pressure rating 200 bar

Independent of fluid
properties

High accuracy, fast
measurement



ブロンコスト・ジャパン株式会社

〒135-0016

東京都江東区東陽5-27-5

TEL. 03-3645-1371

sales◎bronkhorst.jp ◎を@に置き換えて下さい